

Ticom GmbH
 Bachstrasse 41
 CH 8912 Obfelden
 Tel. ++41 44 763 40 10
 Fax ++41 44 763 40 19
 www.ticom.ch / info@ticom.ch

threaded or flanged, DN 20 - DN 200




Application

Absorbs vibrations (eg from heat pumps, fans). Reduces noise and stresses from axial / lateral movements.

Ideal for heating, refrigeration, air conditioning, ventilation, etc.

Operating temperature [°C]	Max. operating pressure [bar]
20	16
50	10
70	8
90	5
Max. temperature range:	galvanized steel -10°C to +90°C stainless steel AISI 304 -10°C to +110°C
Materials	
Bellow	EPDM / Nylon
Female thread connection	galvanized steel or stainless steel AISI 304
Flanges PN16	galvanized steel (stainless steel on request)

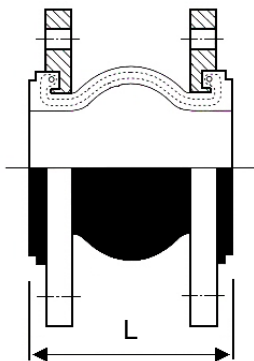


Flanged PN16 (up to DN1200 on request)

Lateral movement max. 8 mm (DN32) - 22 mm (DN200)

Article-No.	DN	length L [mm]	Axial movem. [mm]	angled
95.1032	32	93	+4 / -8	max. 15°
95.1040	40	93	+4 / -8	max. 15°
95.1050	50	99	+5 / -8	max. 15°
95.1065	65	108	+6 / -12	max. 15°
95.1080	80	116	+6 / -12	max. 15°
95.1100	100	129	+10 / -18	max. 15°
95.1125	125	142	+10 / -18	max. 15°
95.1150	150	156	+10 / -18	max. 15°
95.1200	200	177	+14 / -25	max. 15°

(Versions with stainless steel flanges on request)



Female thread connection (DN100 on request)

Lateral movement max. 23 mm

Article-No. (1)	Article-No. (2)	DN	length L [mm]	Axial move. [mm] (1)	Axial move. [mm] (2)	angled
95.2020.000	95.2020.304	20	165	+6 / -25	+10 / -12	max. 35°
95.2025.000	95.2025.304	25	175	+6 / -25	+10 / -12	max. 30°
95.2032.000	95.2032.304	32	186	+6 / -25	+10 / -12	max. 30°
95.2040.000	95.2040.304	40	186	+6 / -25	+10 / -12	max. 30°
95.2050.000	95.2050.304	50	200	+6 / -25	+10 / -12	max. 20°
95.2065.000	95.2065.304	65	218	+6 / -25	+10 / -12	max. 15°
95.2080.000	95.2080.304	80	260	+6 / -25	+10 / -12	max. 15°